

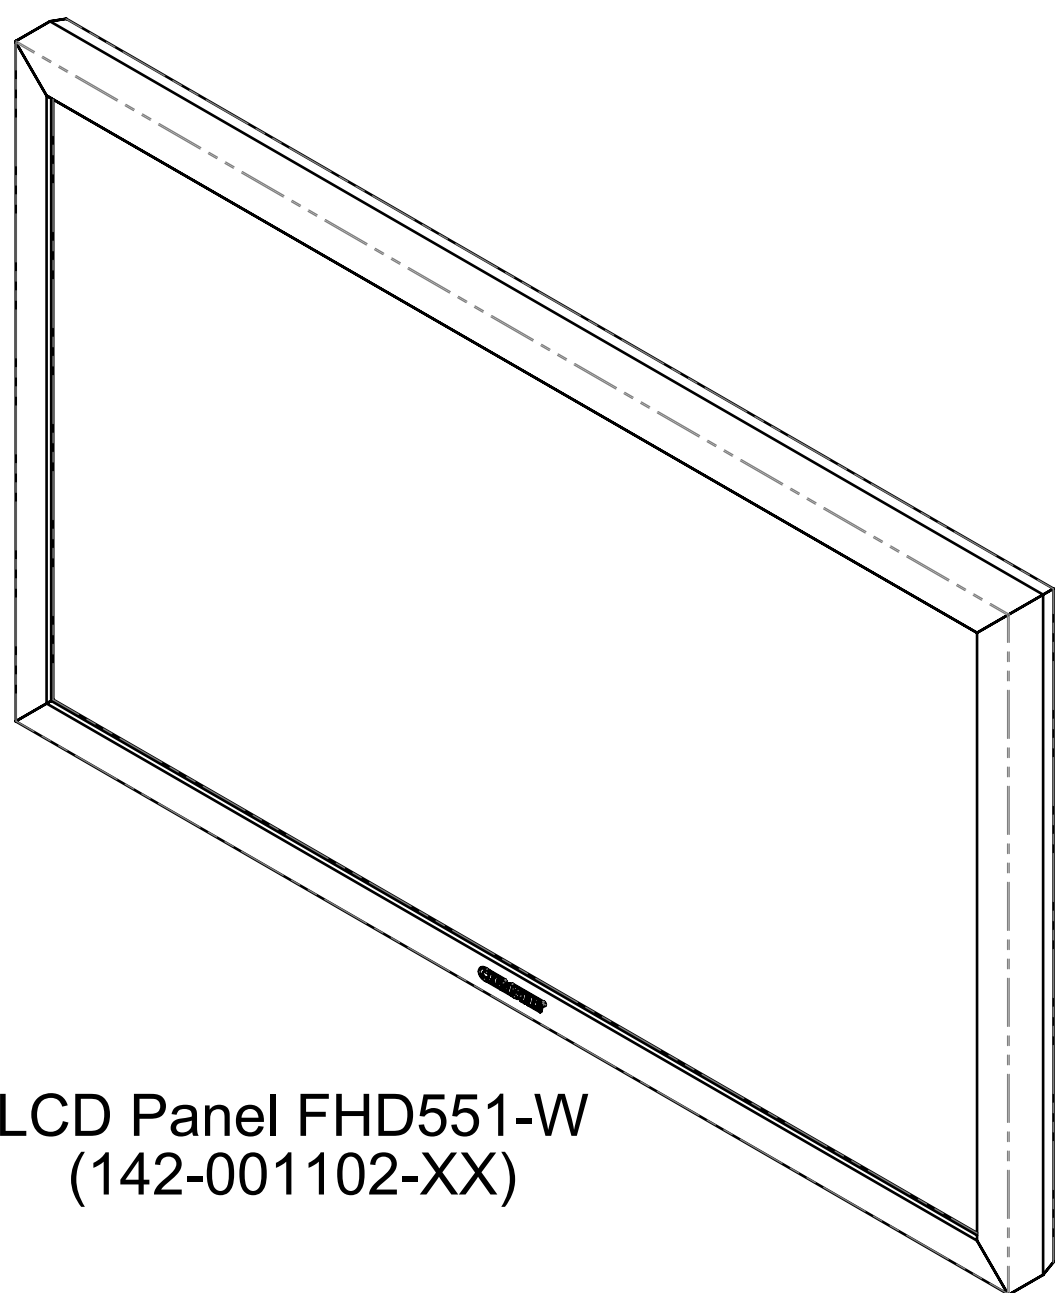
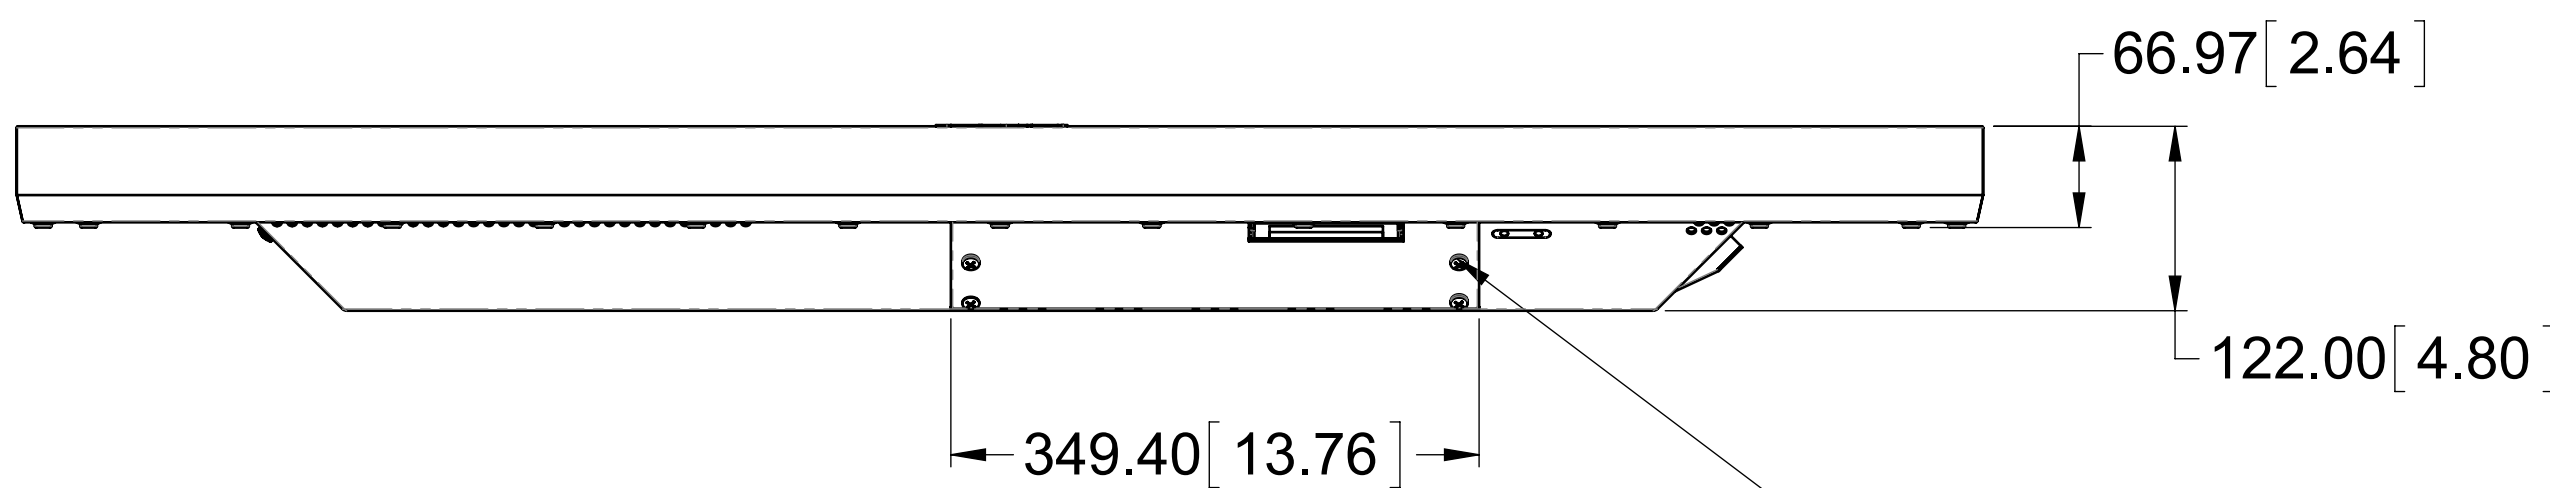


REVISION HISTORY OF: 020-000632-01			
REV	DESCRIPTION OF CHANGE	BY	REV DATE
01	INITIAL RELEASE	VV	06/24/2013

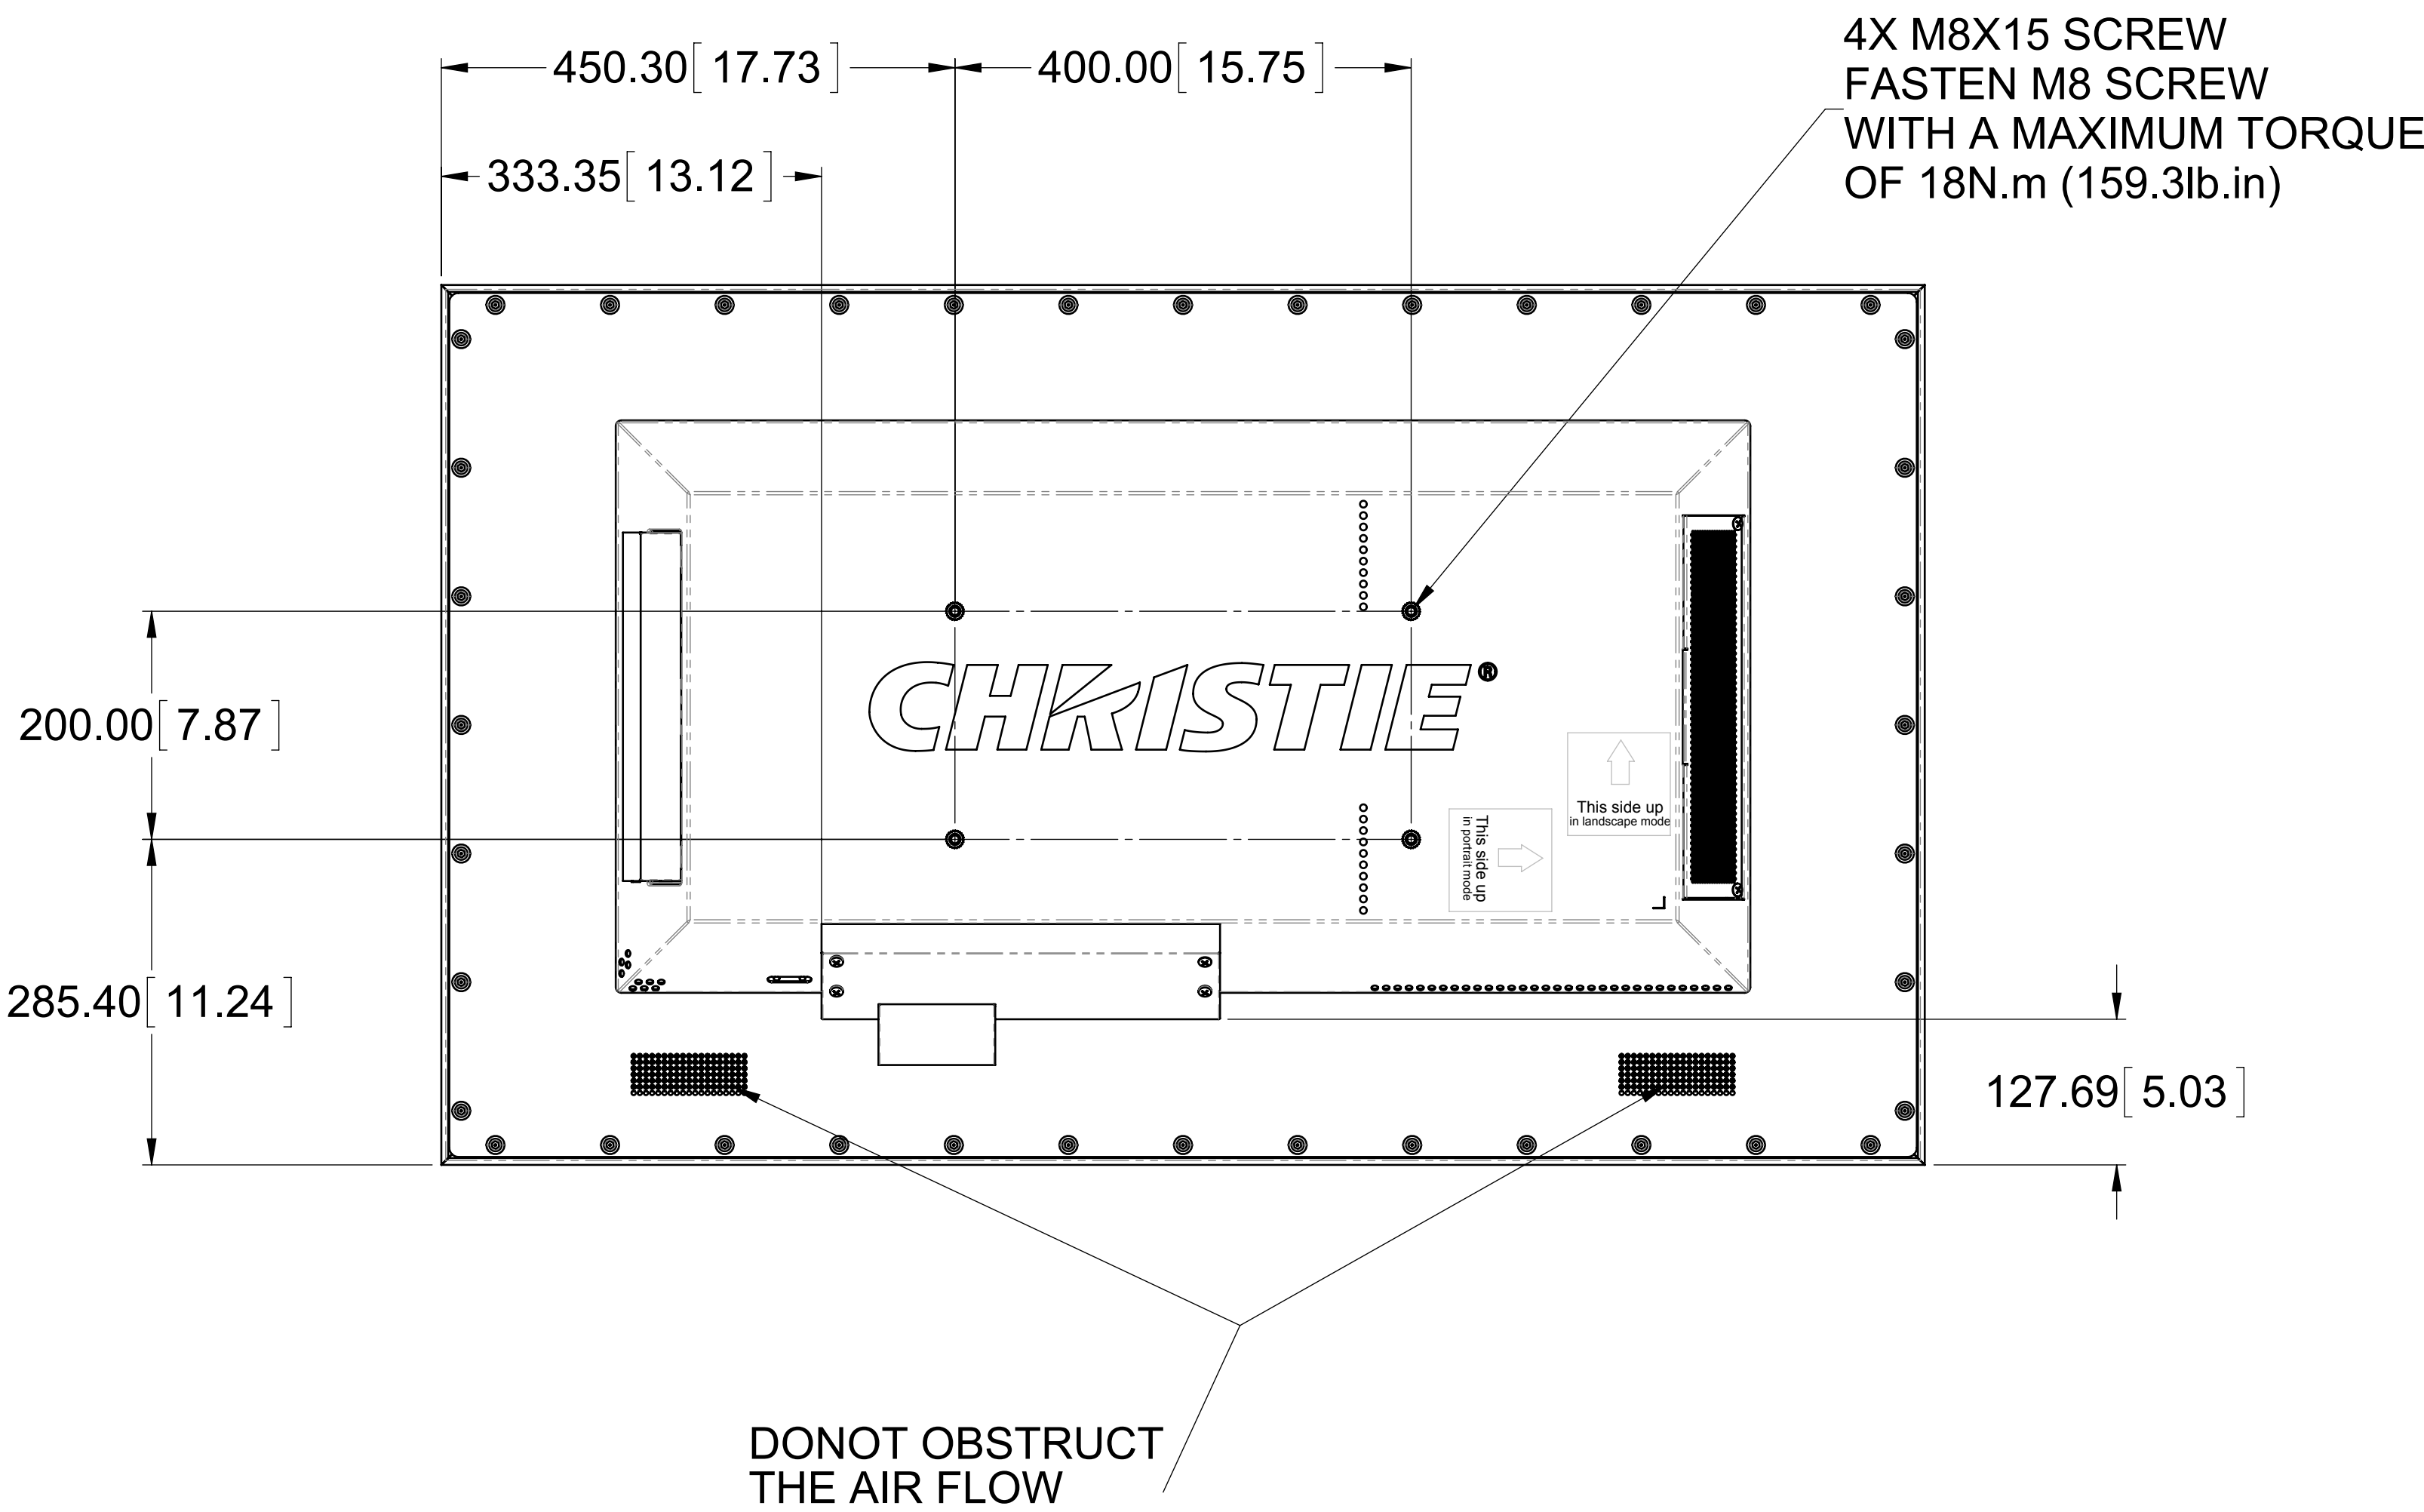

LCD Panel FHD551-W  
(142-001102-XX)

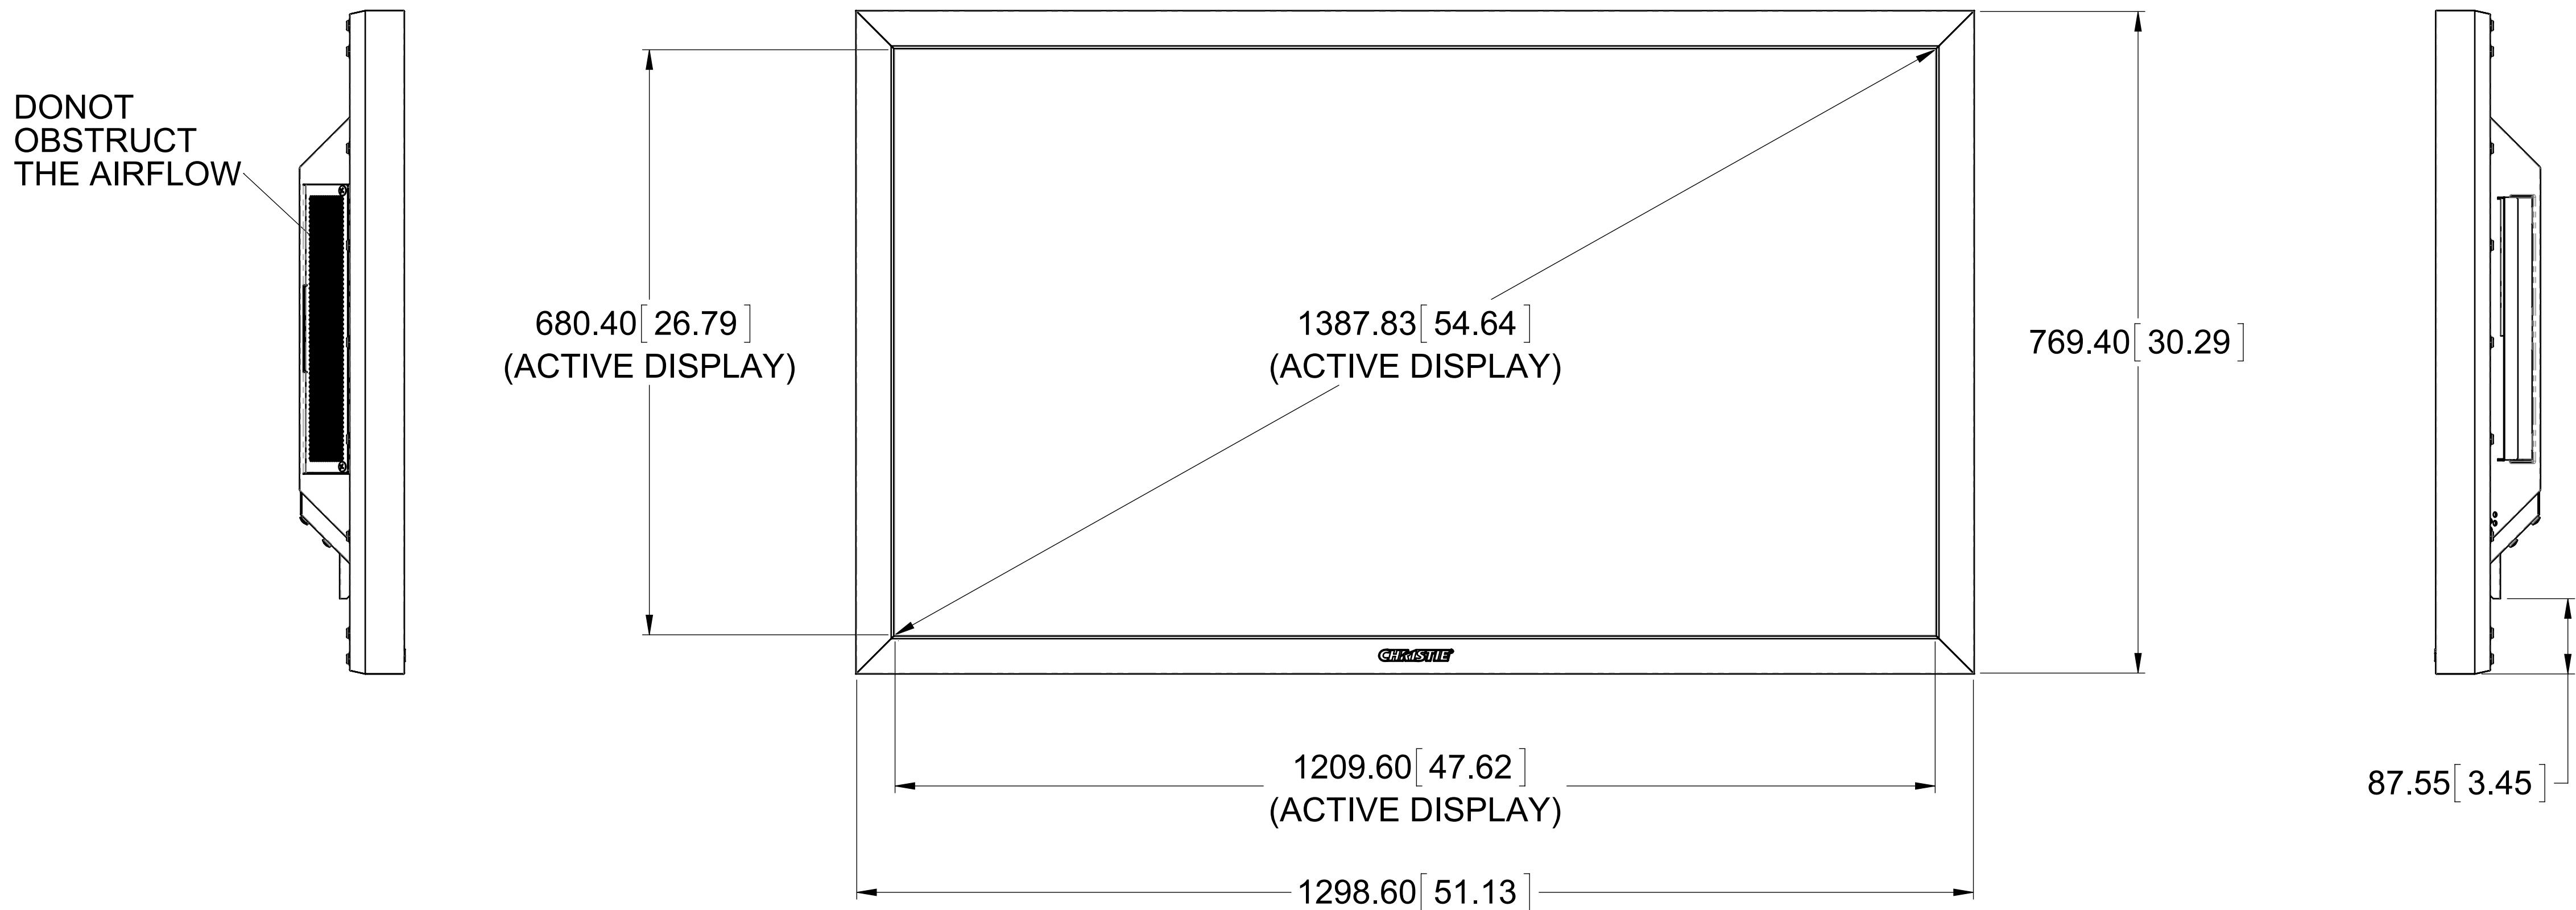

REMOVE COVER (4X M6 SCREWS)  
TO ACCESS POWER, DISPLAY  
AND OTHER CONNECTORS.  
LINE GAUGE MUST BE < Ø8MM  
TO PREVENT WATER INGRESS.

GENERAL NOTES:

- NET WEIGHT: 55 kg (121.3 lbs)  
GROSS WEIGHT: 60kg (132.3 lbs)
- OPERATING TEMPERATURE: -20°C TO 45°C, COLD START AT 0°C (-4°F TO 113°F)  
STORAGE TEMPERATURE: -30°C TO 60°C (-22°F TO 140°F)
- POWER REQUIREMENTS: AC100-240V (WORLDWIDE), MAX 4A , 50-60Hz
- MAX POWER CONSUMPTION: ≤ 265W (@ 100% BACKLIGHT)  
TYPICAL POWER CONSUMPTION: 175W (@ 80% BACKLIGHT)
- INGRESS PROTECTION RATING: IP56
- NOT RECOMMENDED FOR CONTINUOUS USE OF OVER 20HOURS
- REFER 020-100996-XX FOR CLEANING INSTRUCTIONS OF THE PANEL, DUST FILTER, ETC.

UNITS		INCHES		MILLIMETRES		DRAWN BY: V. VARDHANAN		CHRISTIE DIGITAL SYSTEMS	
UNLESS OTHERWISE SPECIFIED		INCHES		MILLIMETRES		DRAWN DATE: 06/24/2013		USA, INC.	
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994		INCHES		MILLIMETRES		APPROVED BY: R. HENRIKSEN		CHRISTIE DIGITAL SYSTEMS	
TOLERANCES APPLY AS SHOWN BELOW		INCHES		MILLIMETRES		APPROVAL DATE: 06/27/2013		CANADA, INC.	
DECIMAL PLACES		INCHES		MILLIMETRES		NOT TO BE DISCLOSED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF CHRISTIE		PART DESCRIPTION	
.XXX		± .003		± 0.08					
.XX		± .006		± 0.15					
.X		± .010		± 0.25		THIRD ANGLE PROJECTION		PART NUMBER	
ANGULAR DIMENSIONS		INCHES		MILLIMETRES					
XX°		± 1.0°		± 0.5°					
XX.X°		± 0.5°		± 0.1°		SCALE		1:5	